

LED DOWNLIGHT


Product&Family Code: 016 036 0003

BIANCA


WHITE


MAT CHROME

Technical Drawing



Ø 35 mm

Photometric Diagram

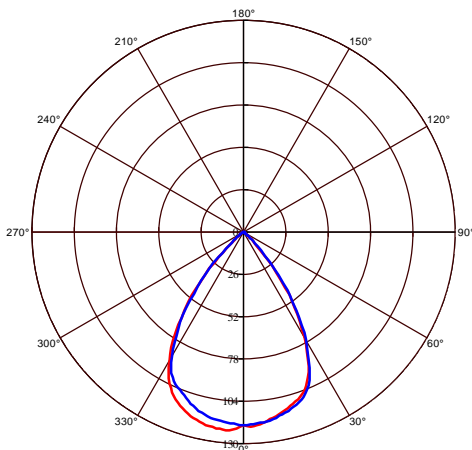

C0 Plane beam angle(50%) C90 Plane beam angle(50%)

C0 Plane beam angle(50%):68.7(DEG) C90 Plane beam angle(50%):69.5(DEG)

Technical Data

Voltage (V)	85-265V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K
Materials	Aluminium
Protection Class	II
Dimmable	No
EEL	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	210
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Indoor Applications; Bathroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.

