

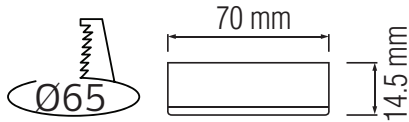
LED DOWNLIGHT

Product&Family Code: 016 041 0003

LUNA

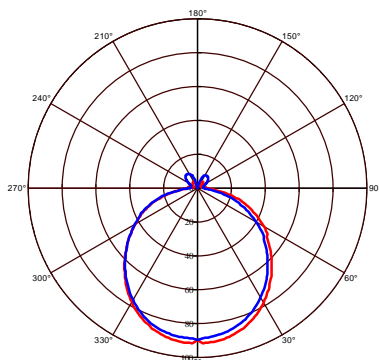

WHITE

Technical Drawing



Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K
Materials	Aluminium + Plastic
Protection Class	II
Dimmable	No
EEI	A T G
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	210
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	20.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x10.000

Photometric Diagram


 C0 Plane beam angle(50%) C90 Plane beam angle(50%)
 C0 Plane beam angle(50%):115.6(DEG) C90 Plane beam angle(50%):113.7(DEG)

Applications

- Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Features

- Recessed+Surface Mounting Available
- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

