

# LED SUSPENSION LIGHT


Product&Family Code: 019 037 0020

**CRATER**




**CHROME**

## Technical Drawing

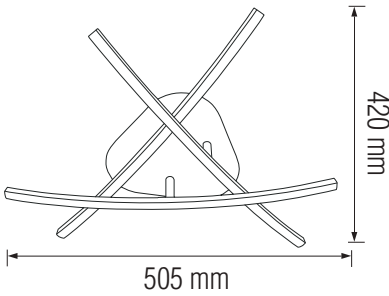

## Photometric Diagram

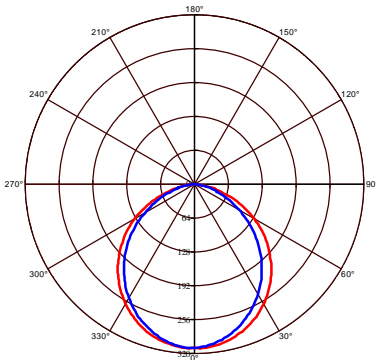

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)  
C0 Plane beam angle(50%):109.5(DEG) C90 Plane beam angle(50%):99.1(DEG)

Technical Data	
Voltage (V)	180-240
Product Wattage (W)	20
Equivalence with incandescent lamp(W)	160
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4000K
Materials	Aluminium + Acrylic
Protection Class	I
Dimmable	No
EEL	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	900
Luminous Efficacy (lm/W)	45
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°

## Applications

- LED Suspension Light has been specifically designed for use indoors and is ideal for both hospitality and residential lighting.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base
- Very low energy consumption

