

LED SENSOR DECORATIVE CEILING LAMP

Product&Family Code: 027 015 0020

CRAMER




- Detection Distance: 3m (radii) (<24°C)
- Detection ANGLE 360°
- Time setting: 10sec-3min (adjustable)
- Detection moving speed: 0.6-1.5m/S
- Relative humidity: <93%R
- Working temperature: -20-+40°C
- Installation height: 2.2m-3.5m


Technical Data

| | |
|---|--------------------|
| Voltage (V) | 180-260V |
| Product Wattage (W) | 20 |
| Equivalence with incandescent lamp | 180 |
| Colour Render Index (Ra) | >80 |
| Colour Temperature (K) | 4200K - 6400K |
| Materials | ABS + PS |
| Protection Class | II |
| Dimmable | No |
| EEL | - |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 1500 |
| Luminous Efficacy (lm/W) | 75 |
| Rated Life (hrs) Ⓢ | 30.000 |
| IP Rating | 20 |
| Power Factor | >0.7 |
| Beam Angle | 120° |
| Starting Time | <0.2s |
| Number of ON-OFF cycling | x15.000 |

Technical Drawing



Applications

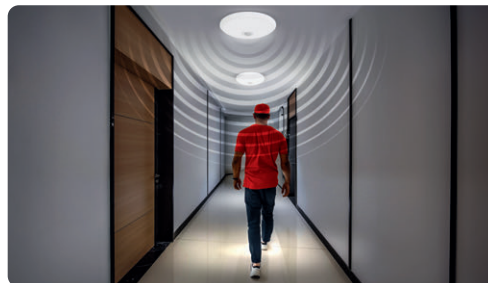

Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

