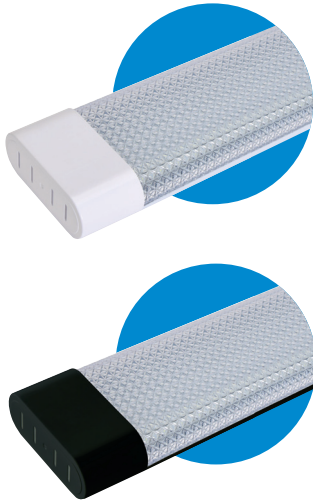
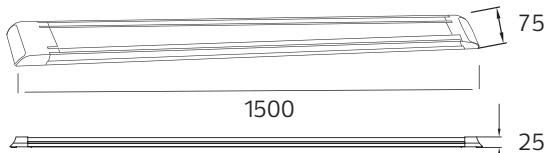
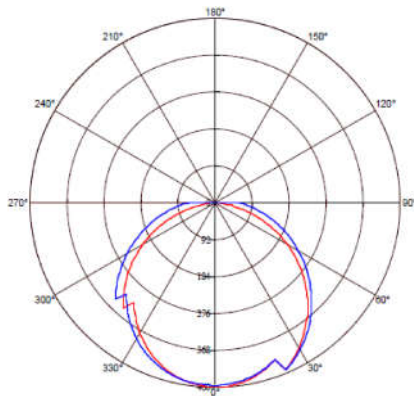


LED BATTEN LIGHT

Product&Family Code: 052 006 0150

GAMA-80

Technical Drawing

Technical Data	
Voltage (V)	165-265V
Product Wattage (W)	80
Equivalence with incandescent lamp(W)	640
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	6400K
Materials	PS + IRON
Protection Class	II
Dimmable	No
EEI (Containing Product)	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	6000
Luminous Efficacy (lm/W)	75
Rated Life (hrs) ⌚	20.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Number of ON-OFF cycling	10.000


Photometric Diagram


☐ C0 Plane beam angle(50%) ☐ C90 Plane beam angle(50%)
 C0 Plane beam angle(50%):113.7(DEG) C90 Plane beam angle(50%):124.2(DEG)

Applications

- Designed indoor applications.


Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

