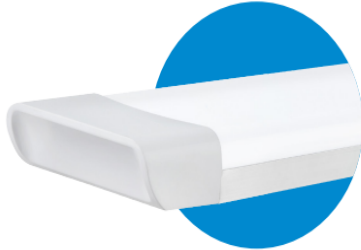
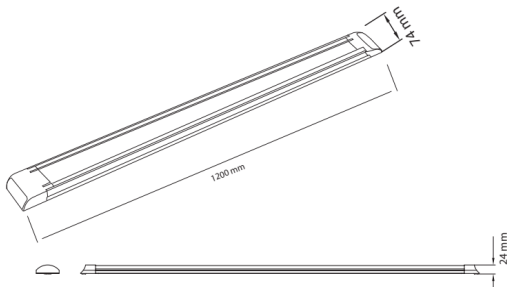


LED BATTEN LIGHT


Product&Family Code: 052 005 0120

TETRA/SQ-54

WHITE
BLACK

Technical Drawing

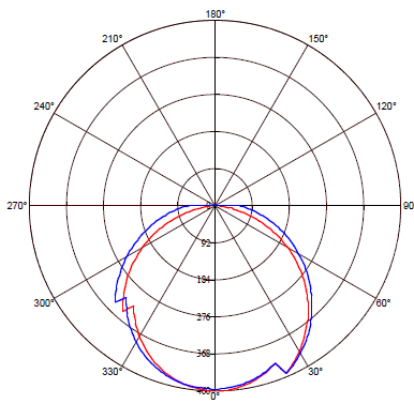

Photometric Diagram



C0 Plane beam angle(50%): 113.7(DEG) C90 Plane beam angle(50%): 124.2(DEG)

Technical Data

Voltage (V)	165-265V
Product Wattage (W)	54
Equivalence with incandescent lamp(W)	432
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	6400K
Materials	PS + ALUMINIUM
Protection Class	II
Dimmable	No
EEI	-
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	3780
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	25.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Size (cm)	120
Number of ON-OFF cycling	x12.500

Applications

- Designed indoor applications.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

